


MAIL BOX INSTALLATION STANDARDS
ILLUSTRATION ONLY

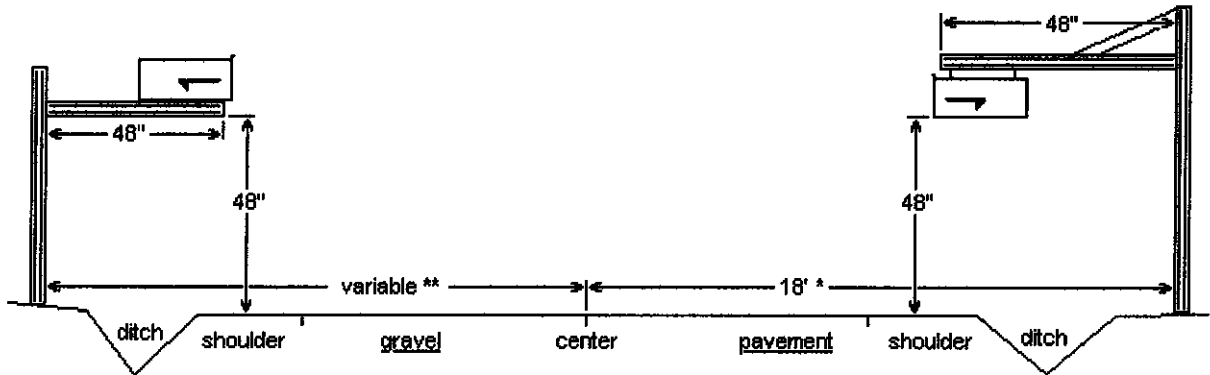

PAVED ROAD: Vertical Post shall be placed 18 feet from center of travel way

GRAVEL ROAD: Width of these roads vary, therefore judgment must be used to determine proper vertical post placement. Post shall be placed the lost side of the ditch and the mailbox must be suspended over the shoulder area of the road.

PURPOSE: To permit the Highway's plow blades to pass under the mailbox and to prevent destruction of the post.

LOCATION: Contact the Post Office to determine which side of the road to place your mailbox

Town Policy is that if the **MAIL BOX IS** installed according to the requirements, it will be replaced. If the **MAIL BOX IS NOT** installed according to the requirements, the homeowner is at his/her own risk of damage or destruction of property and the Town **WILL NOT** be responsible for replacement.